


Pearson Hydraulics Ltd part number - OILT1-###BLK


Tube: Oil and petrol resistant, black NBR hose.
Reinforcement: High tensile, synthetic textile, steel wire helix and antistatic copper wire.
Cover: Oil, weather, ozone, abrasion resistant special synthetic rubber.
Application: For suction and discharge of petroleum products with aromatic content up to 50%.

Please contact our sales team on 01522 846846 should you not find the product or Technical information you require on our website.

Oil S&D 10 Bar

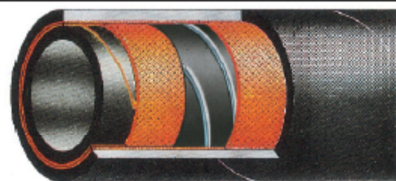

ID		OD		WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
1"	25.4	36	36	10	145	30	435	-0.92	110	707	40-46-61
1 1/4"	32	43	43	10	145	30	435	-0.92	140	914	40-46-61
1 1/2"	38	49	49	10	145	30	435	-0.92	170	1155	40-46-61
1 3/4"	44.5	56	56	10	145	30	435	-0.92	210	1363	40-46-61
2"	50.8	63	63	10	145	30	435	-0.92	250	1644	40-46-61
2 1/2"	63.5	76	76	10	145	30	435	-0.92	310	2129	40-46-61
3"	76.2	89	89	10	145	30	435	-0.92	380	2768	40-46-61
3 1/2"	90	105	105	10	145	30	435	-0.92	450	3605	40-46-61
4"	101.6	117	117	10	145	30	435	-0.92	510	4035	40-46-61
5"	127	145	145	10	145	30	435	-0.80	650	6210	40-46-61
6"	152.4	170	170	10	145	30	435	-0.80	790	7750	40-46-61



-30°C / + 70°C
 -22°F / +158°F